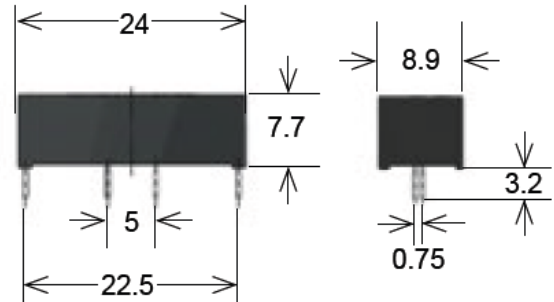


# MK02/6 Series Reed Sensors



- Features: Ferrous Metal Detection, Front or Above Operation, THT
- Applications: Door & Window Control, Fire Protection Doors, Safety & Interlock Sensing & Others
- Markets: Industrial, Security & Others

Part Description: **MK 02/6-0**

| Operation Series | Contact QTY |
|------------------|-------------|
| 6                | 01          |




| Customer Options   | Switch Model    | Unit |
|--|-----------------|------|
| <b>Contact Data</b>  | <b>80</b>       |      |
| <b>Rated Power (max.)</b><br>Any DC combination of V&A not to exceed their individual max.'s | 10              | W    |
| <b>Switching Voltage (max.)</b><br>DC or peak AC   | 170             | V    |
| <b>Switching Current (max.)</b><br>DC or peak AC   | 0.5             | A    |
| <b>Carry Current (max.)</b><br>DC or peak AC   | 0.5             | A    |
| <b>Contact Resistance (max.)</b><br>@ 0.5V & 50mA  | 200             | mOhm |
| <b>Breakdown Voltage (min.)</b><br>According to EN60255-5                                    | 0.21            | kVDC |
| <b>Operating Time (max.)</b><br>Incl. Bounce; Measured with w/ Nominal Voltage               | 0.6             | ms   |
| <b>Release Time (max.)</b><br>Measured with no Coil Excitation                               | 0.05            | ms   |
| <b>Insulation Resistance (typ.)</b><br>Rh<45%, 100V Test Voltage                             | 10 <sup>9</sup> | GOhm |
| <b>Capacitance (typ.)</b><br>@ 10kHz across open Switch                                      | 0.4             | pF   |

Series Datasheet – MK02/6 Reed Sensors

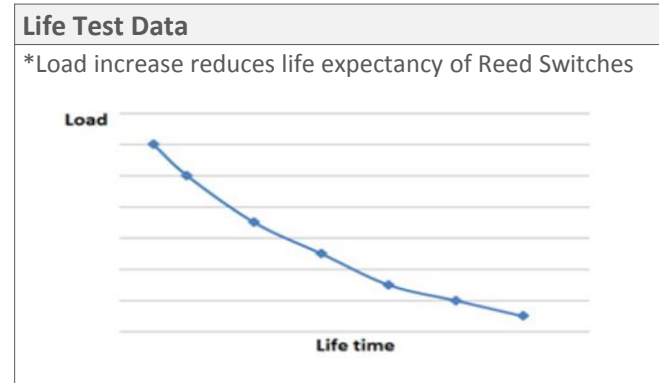
www.andiantech.com

| Housing and Cable Specifications |                            |
|----------------------------------|----------------------------|
| Housing Material                 | PBT Glass Fibre Reinforced |
| Case Color                       | Black                      |
| Sealing Compound                 | Polyurethan                |

| Environmental Data                                     |           | Unit |
|--|-----------|------|
| Shock Resistance (max.)<br>1/2 sine wave duration 11ms | 50        | g    |
| Vibration Resistance (max.)                            | 20        | g    |
| Operating Temperature                                  | -20 to 80 | °C   |
| Storage Temperature                                    | -20 to 80 | °C   |

| Glossary Contact Form |  |   |
|-----------------------|--|---|
| Form A                | NO = Normally Open Contacts<br>SPST = Single Pole Single Throw   |    |
| Form B                | NC = Normally Closed Contacts<br>SPST = Single Pole Single Throw |   |
| Form C                | Changeover<br>SPDT = Single Pole Double Throw                    |  |

| Handling & Assembly Instructions |  |
|----------------------------------|--|
| ➤                                | Use proper lead clamping/heat sinking techniques to prevent mechanical and/or heat stress during soldering & welding |
| ➤                                | Mechanical shock as the result of dropping the reed sensor may cause immediate or post-installation failure          |
| ➤                                | Only a simple piece of iron is required to activate switching position   |



Operation Series – PCB Through Hole Mount

For best operation it is recommended that you DO NOT mount these sensors on any ferromagnetic material OR use any ferromagnetic screws.

